



倍测检测  
BCTC TEST

<b>TEST REPORT</b> <b>IEC 62133-2</b> <b>Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications –</b> <b>Part 2: Lithium systems</b>	
<b>Report Number</b> .....	: BCTC-FY190603420B
<b>Date of issue</b> .....	: 2019-07-09
<b>Total number of pages</b> .....	: 25 pages
<b>Applicant's name</b> .....	: Lipol Battery Co., Ltd.
<b>Address</b> .....	: Bldg 4a, Junfeng Industrial Zone, Chongqing Rd., Shenzhen, China
<b>Test specification:</b>	
<b>Standard</b> .....	: IEC 62133-2:2017
<b>Test procedure</b> .....	: Commission Test
<b>Non-standard test method</b> .....	: N/A
<b>Test Report Form No.</b> .....	: IEC62133_2A
<b>Test Report Form(s) Originator</b> ....	: DEKRA
<b>Master TRF</b> .....	: Dated 2017-08-10
<b>Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
<b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced except in full, without the written approval of Shenzhen BCTC Testing Co., Ltd. This report may be altered or revised by Shenzhen BCTC Testing Co., Ltd. personnel only, and shall be noted in the revision section of the report. The test results in the report only apply to the tested samples.	



<b>Test item description</b> ..... :	Li-ion Polymer Battery	
<b>Trade Mark</b> ..... :	N/A	
<b>Manufacturer</b> .....	Same as applicant	
<b>Model/Type reference</b> ..... :	LP481922	
<b>Ratings</b> .....	3.7V, 135mAh, 0.50Wh	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>Testing Laboratory:</b>	Shenzhen BCTC Testing Co., Ltd.
	<b>Testing location/ address</b> ..... :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
	<b>Tested by (name, function, signature)</b> ..... :	Andre Yu (Project Engineer)
	<b>Approved by (name, function, signature)</b> .... :	Peter Pan (Reviewer)



<b>List of Attachments (including a total number of pages in each attachment):</b>	
Attachment 1: Circuit Diagram & PCB layout (1 page)	
Attachment 2: Photo Documentation (3 pages)	
<b>Summary of testing:</b>	
<b>Tests performed (name of test and test clause):</b> 7.1 Charging procedure for test purposes; 7.2.1 Continuous charging at constant voltage (cells); 7.3.1 External short circuit (cell); 7.3.2 External short circuit (battery); 7.3.3 Free fall(cell and battery); 7.3.4 Thermal abuse (cells); 7.3.5 Crush (cells); 7.3.6 Over-charging of battery; 7.3.7 Forced discharge (cells); 7.3.8 Mechanical test (batteries)	<b>Testing location:</b> Shenzhen BCTC Testing Co., Ltd. BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
<b>Summary of compliance with National Differences (List of countries addressed):</b>	
N/A	
<input checked="" type="checkbox"/> <b>The product fulfils the requirements of EN 62133-2: 2017.</b>	



**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

Li-ion Polymer Battery  
LP481922  
3.7V, 135mAh, 0.50Wh  
1ICP6/20/21 2019.05.20  
Lipol Battery Co., Ltd.  
Red(+) Black(-)  
Made in China

**Remark:**

2019.05.20 represent the production date is May 20, 2019.



<b>Test item particulars.....:</b>	
<b>Classification of installation and use.....:</b>	To be defined in final product.
<b>Supply Connection .....</b>	DC lead wire
<b>Recommend charging method declared by the manufacturer .....</b>	Charge at constant current 27mA until the voltage reaches 4.2V, then charge at 4.2V until charge current declines to 2.7mA.
<b>Discharge current (0,2 It A) .....</b>	27mA
<b>Specified final voltage.....:</b>	2.75V
<b>Upper limit charging voltage per cell.....:</b>	4.25V
<b>Maximum charging current .....</b>	67.5mA
<b>Charging temperature upper limit .....</b>	45°C
<b>Charging temperature lower limit.....:</b>	0°C
<b>Polymer cell electrolyte type.....:</b>	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
<b>Testing.....:</b>	
<b>Date of receipt of test item .....</b>	2019-06-20
<b>Date (s) of performance of tests .....</b>	2019-06-20 to 2019-07-05
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
<b>Name and address of factory (ies) .....</b> : Same as manufacturer	



**General product information and other remarks:**

Only test are performed in this report. The technology documentations, which should be provided by the manufacturer for the review requirement of IEC 62133, are not included in this report.

This battery is constructed with one lithium-ion cell, and has overcharge, over-discharge, over current and short-circuits proof circuit.

The cell consists of the positive electrode plate, negative electrode plate, separator, electrolyte and aluminum plastic film case.

The main features of the cell in the battery pack are shown as below:

Product name	Li-ion Cell	Li-ion Polymer Battery
Model No.	LP481922	LP481922
Recommend charging voltage	4.2V	4.2V
Recommend charging current	27mA	27mA
Max. charging current	67.5mA	67.5mA
End of discharging voltage	2.75V	2.75V
Recommend discharging current	27mA	27mA
Max. discharging current	135mA	135mA
Operation Temperature	Charge: 0-45°C Discharge: -20-60°C	Charge: 0-45°C Discharge: -20-60°C



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>PARAMETER MEASUREMENT TOLERANCES</b>		P
	Parameter measurement tolerances		P
<b>5</b>	<b>GENERAL SAFETY CONSIDERATIONS</b>		P
<b>5.1</b>	<b>General</b>		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
<b>5.2</b>	<b>Insulation and wiring</b>		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No externally exposed metal surfaces.	N/A
	Insulation resistance (MΩ) ..... :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearance and creepage distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
<b>5.3</b>	<b>Venting</b>		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition		P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
<b>5.4</b>	<b>Temperature, voltage and current management</b>	See below	P
	Batteries are designed such that abnormal temperature rise conditions are prevented		P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer		P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	Specification provided.	P
<b>5.5</b>	<b>Terminal contacts</b>		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current		P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance	Complied, DC lead wire used	P
	Terminal contacts are arranged to minimize the risk of short-circuit		N/A
<b>5.6</b>	<b>Assembly of cells into batteries</b>		P
5.6.1	General		P
	Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region	Single cell battery.	P
	This protection may be provided external to the battery such as within the charger or the end devices		N/A
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components added as appropriate and consideration given to the end-device application		P
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		N/A
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2	Charging voltage of the cell is 4.2V, not exceed the upper limit of the charging voltage specified in Table 2.	P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage		P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse		P
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product	To be evaluated in end-product.	N/A
	The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer		N/A
	For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests		N/A
5.7	<b>Quality plan</b>		P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	ISO 9001: 2000 certificate provided.	P
<b>5.8</b>	<b>Battery safety components</b>		P
	According annex F		P

<b>6</b>	<b>TYPE TEST AND SAMPLE SIZE</b>		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old	Tests are performed according to specified in Table 1 of this standard. The samples are not more than six months old.	P
	Coin cells with resistance $\leq 3 \Omega$ (measured according annex D) are tested according table 1	Not coin cell.	N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$		P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection		P
	When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test		P

<b>7</b>	<b>SPECIFIC REQUIREMENTS AND TESTS</b>		P
<b>7.1</b>	<b>Charging procedure for test purposes</b>		P
7.1.1	First procedure		P
	This charging procedure applies to sub clauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ , using the method declared by the manufacturer		P
	Prior to charging, the battery have been discharged at $20 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ at a constant current of 0,2 It A down to a specified final voltage		P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	After stabilization for 1 h and 4 h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant voltage charging method	Charge temperature 0-45°C declared. 45°C and -5°C were used as highest test temperature and lowest test temperature during tests.	P
<b>7.2</b>	<b>Intended use</b>		P
7.2.1	Continuous charging at constant voltage (cells)		P
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer		P
	Results: No fire. No explosion. No leakage..... :	(See appended table 7.2.1)	P
7.2.2	Case stress at high ambient temperature (battery)		N/A
	Oven temperature (°C)..... :	70°C	—
	Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells		N/A
<b>7.3</b>	<b>Reasonably foreseeable misuse</b>		P
7.3.1	External short-circuit (cell)		P
	The cells were tested until one of the following occurred:		P
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		P
	Results: No fire. No explosion..... :	(See appended table 7.3.1)	P
7.3.2	External short-circuit (battery)		P
	The batteries were tested until one of the following occurred:		P
	- 24 hours elapsed; or		P
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		N/A
	A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test		P
	A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermis tor	Single fault on U2 (pin1-pin2)	P
	Results: No fire. No explosion..... :	(See appended table 7.3.2)	P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
7.3.3	Free fall		P
	Results: No fire. No explosion		P
7.3.4	Thermal abuse (cells)		P
	Oven temperature (°C).....: 130°C		—
	Results: No fire. No explosion		P
7.3.5	Crush (cells)		P
	The crushing force was released upon:		P
	- The maximum force of 13 kN ± 0,78 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: No fire. No explosion.....: (See appended table 7.3.5)		P
7.3.6	Over-charging of battery		P
	The supply voltage which is:		P
	- 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or	5.95V used for test.	P
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		N/A
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached		P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion.....: (See appended table 7.3.6)		P
7.3.7	Forced discharge (cells)		P
	If the discharge voltage reaches the negative value of upper limit charging voltage within the testing duration, the voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	If the discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration, the test is terminated at the end of the testing duration		P
	Results: No fire. No explosion.....: (See appended table 7.3.7)		P
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration		P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	Results: No fire, no explosion, no rupture, no leakage or venting. .... :	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock		P
	Results: No leakage, no venting, no rupture, no explosion and no fire .... :	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)		N/A
	The cells complied with national requirement for ..... :	Not requires by client. Not sale to France, Japan, Korea, Switzerland	—
	The pressing was stopped upon:		N/A
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached		N/A
	Results: No fire .... :	(See appended table 7.3.9)	N/A

<b>8</b>	<b>INFORMATION FOR SAFETY</b>		P
<b>8.1</b>	<b>General</b>		P
	Manufacturers of secondary cells ensure that information is provided about current, voltage and temperature limits of their products	Information is given in manufacturer's specifications.	P
	Manufacturers of batteries ensure that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards	Information is given in manufacturer's specifications.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, any information relating to hazard avoidance resulting from a system analysis provided to the end user		N/A
	Do not allow children to replace batteries without adult supervision		N/A
<b>8.2</b>	<b>Small cell and battery safety information</b>		P
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		P
	- Keep small cells and batteries which are considered swallow able out of the reach of children		P
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	- In case of ingestion of a cell or battery, seek medical assistance promptly		P
<b>9</b>	<b>MARKING</b>		P
<b>9.1</b>	<b>Cell marking</b>	Not cell.	N/A
	Cells marked as specified in IEC 61960, except coin cells		N/A
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
<b>9.2</b>	<b>Battery marking</b>		P
	Batteries marked as specified in IEC 61960, except for coin batteries	The battery is marked in according with IEC 61960.	P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity. Batteries also marked with an appropriate caution statement	Not coin battery.	N/A
	Terminals have clear polarity marking on the external surface of the battery	See page 3.	P
	Batteries with keyed external connectors designed for connection to specific end products need not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		N/A
<b>9.3</b>	<b>Caution for ingestion of small cells and batteries</b>		P
	Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2		P
	When small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion given on the immediate package		P
<b>9.4</b>	<b>Other information</b>		P
	Storage and disposal instructions	Information is given in manufacturer's specifications.	P
	Recommended charging instructions	Information is given in manufacturer's specifications.	P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
<b>10</b>	<b>PACKAGING AND TRANSPORT</b>		P
	Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3	Not coin cell.	N/A
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants		P

<b>ANNEX A</b>	<b>CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE</b>		P
<b>A.1</b>	<b>General</b>		P
<b>A.2</b>	<b>Safety of lithium ion secondary battery</b>		P
<b>A.3</b>	<b>Consideration on charging voltage</b>		P
A.3.1	General		P
A.3.2	Upper limit charging voltage		P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied	4.25 applied.	N/A
<b>A.4</b>	<b>Consideration of temperature and charging current</b>		P
A.4.1	General		P
A.4.2	Recommended temperature range	Charging temperature range declared by client is 0-45°C	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied		P
A.4.3	High temperature range	Not higher than 45°C.	N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		N/A
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range	-5°C applied.	P
A.4.4.1	General		P
A.4.4.2	Explanation of safety viewpoint		P
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		P
A.4.5	Scope of the application of charging current		P
A.4.6	Consideration of discharge		P
A.4.6.1	General		P
A.4.6.2	Final discharge voltage and explanation of safety viewpoint		P
A.4.6.3	Discharge current and temperature range		P
A.4.6.4	Scope of application of the discharging current		P
<b>A.5</b>	<b>Sample preparation</b>		N/A
A.5.1	General		N/A
A.5.2	Insertion procedure for nickel particle to generate internal short		N/A
A.5.3	Disassembly of charged cell		N/A
A.5.4	Shape of nickel particle		N/A
A.5.5	Insertion of nickel particle in cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle in winding core		N/A
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N/A
A.5.6	Insertion of nickel particle in prismatic cell		N/A
<b>A.6</b>	<b>Experimental procedure of the forced internal short-circuit test</b>		N/A
A.6.1	Material and tools for preparation of nickel particle		N/A
A.6.2	Example of a nickel particle preparation procedure		N/A
A.6.3	Positioning (or placement) of a nickel particle		N/A
A.6.4	Damaged separator precaution		N/A
A.6.5	Caution for rewinding separator and electrode		N/A
A.6.6	Insulation film for preventing short-circuit		N/A
A.6.7	Caution when disassembling a cell		N/A
A.6.8	Protective equipment for safety		N/A
A.6.9	Caution in the case of fire during disassembling		N/A
A.6.10	Caution for the disassembling process and pressing the electrode core		N/A
A.6.11	Recommended specifications for the pressing device		N/A
<b>ANNEX B</b>	<b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b>		P



IEC 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ANNEX C</b>	<b>RECOMMENDATIONS TO THE END-USERS</b>		N/A
<b>ANNEX D</b>	<b>MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS</b>		N/A
<b>D.1</b>	<b>General</b>		N/A
<b>D.2</b>	<b>Method</b>		N/A
	A sample size of three coin cells is required for this measurement..... :	(See appended table D.2)	N/A
	Coin cells with an internal resistance of less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N/A
	Coin cells with an internal resistance greater than 3 Ω require no further testing		N/A
<b>ANNEX E</b>	<b>PACKAGING AND TRANSPORT</b>		N/A
<b>ANNEX F</b>	<b>COMPONENT STANDARDS REFERENCES</b>		N/A



IEC 62133-2: 2017

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Critical components information						P
Object / part No.	Manufacturer / trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>	
PCB	Shenzhen JiaLeXu Technology Co., LTD	YS-2540	V-0, 130°C	--	--	
Wiring	SHENZHEN YUNSHENGDA ELECTRONICS TECHNOLOGY CO LTD	1571	28AWG, 80°C, 30Vac	UL758	UL E332481	
IC (U1)	Ablic Inc.	G3M	V <sub>CU</sub> =4.28±0.025V; V <sub>DL</sub> =2.8±0.05V; T <sub>opr</sub> =-40~85°C	--	--	
MOSFET (U2)	Guangdong Hottech Co. Ltd.	8205A	V <sub>DS</sub> =20V; V <sub>GS</sub> =±8V; I <sub>D</sub> =5A, T <sub>STG</sub> =-55~150°C	--	--	
Cell	Lipol Battery Co., Ltd	LP481922	3.7V, 135mAh	IEC 62133-2: 2017	Tested with appliance.	
-Separator	NKK Corporation	96548	Shutdown temperature: 130°C PP+PE+PP three layers, 20mm*64mm*20µm	--	--	
-Electrolyte	Jiangsu Guotai International Group Co., Ltd.	9521	LiPF <sub>6</sub> , DMC, EMC, EC	--	--	
-Negative electrode	Sinmo technology Inc.	CRT-S	Carbon, Conductive Additive Copper Foil 19mm*62mm*60µm	--	--	
-Positive electrode	Dongguan MIC Technology Co., Ltd.	MIC001	LiCoO <sub>2</sub> , Conductive Additive PVDF Aluminum Foil 19mm*62mm*150µm	--	--	
Supplementary information: <sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039.						



IEC 62133-2: 2017

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

7.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Sample no.	Recommended charging voltage V <sub>c</sub> (Vdc)	Recommended charging current I <sub>rec</sub> (A)	OCV before test (Vdc)	Results	
B001	4.2	0.027	4.18	P	
B002	4.2	0.027	4.18	P	
B003	4.2	0.027	4.18	P	
B004	4.2	0.027	4.18	P	
B005	4.2	0.027	4.18	P	
<b>Supplementary information:</b>					
- No fire or explosion					
- No leakage					

7.3.1	TABLE: External short-circuit (cell)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Results	
<b>Samples charged at charging temperature upper limit<sup>1)</sup></b>						
B006	55.5	4.22	84	97.1	P	
B007	55.5	4.21	86	93.8	P	
B008	55.5	4.22	85	93.4	P	
B009	55.5	4.21	84	92.8	P	
B010	55.5	4.22	85	95.3	P	
<b>Samples charged at charging temperature lower limit<sup>2)</sup></b>						
B011	56.4	4.16	86	99.7	P	
B012	56.4	4.17	84	106.4	P	
B013	56.4	4.17	85	98.4	P	
B014	56.4	4.16	82	99.3	P	
B015	56.4	4.18	85	103.2	P	
<b>Supplementary information:</b>						
- No fire or explosion						
<sup>1)</sup> Cell charged at 45°C.						
<sup>2)</sup> Cell charged at -5°C.						

7.3.2	TABLE: External short-circuit (battery)						P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature rise ΔT (K)	Component single fault condition	Results	
B016	23.7	4.19	86	104.0	U2(pin1-pin2)	P	
B017	23.7	4.18	84	102.5	U2(pin1-pin2)	P	



IEC 62133-2: 2017						
Clause	Requirement + Test				Result - Remark	Verdict
B018	23.7	4.19	87	102.2	U2(pin1-pin2)	P
B019	23.7	4.18	85	103.3	U2(pin1-pin2)	P
B020	23.7	4.18	82	24.8	--	P
<b>Supplementary information:</b>						
- No fire or explosion						

7.3.5	TABLE: Crush (cells)				P
Sample no.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
<b>Samples charged at charging temperature upper limit<sup>1)</sup></b>					
B037	4.22	4.22	13.01	P	
B038	4.21	4.21	13.02	P	
B039	4.22	4.22	13.03	P	
B040	4.21	4.21	13.06	P	
B041	4.22	4.22	13.04	P	
<b>Samples charged at charging temperature lower limit<sup>2)</sup></b>					
B042	4.16	4.16	13.03	P	
B043	4.17	4.17	13.02	P	
B044	4.16	4.16	13.04	P	
B045	4.17	4.17	13.06	P	
B046	4.17	4.17	13.02	P	
<b>Supplementary information:</b>					
- No fire or explosion					
<sup>1)</sup> Cell charged at 45°C.					
<sup>2)</sup> Cell charged at -5°C.					

7.3.6	TABLE: Over-charging of battery				P
Constant charging current (A) .....			0.27	—	
Supply voltage (Vdc) .....			5.95	—	
Sample no.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results	
B047	2.99	60	25.3	P	
B048	2.98	60	26.1	P	
B049	2.88	60	26.7	P	
B050	2.89	60	25.8	P	
B051	2.96	60	24.8	P	
<b>Supplementary information:</b>					
- No fire or explosion					



IEC 62133-2: 2017

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

7.3.7	TABLE: Forced discharge (cells)				P
Sample no.	OCV before application of reverse charge (Vdc)	Measured reverse charge $I_r$ (A)	Lower limit discharge voltage (Vdc)	Results	
B052	3.41	0.135	2.75	P	
B053	3.40	0.135	2.75	P	
B054	3.41	0.135	2.75	P	
B055	3.40	0.135	2.75	P	
B056	3.41	0.135	2.75	P	

**Supplementary information:**  
- No fire or explosion

7.3.8.1	TABLE: Vibration				P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results
B057	4.170	4.169	3.472	3.471	P
B058	4.174	4.173	3.486	3.486	P
B059	4.168	4.168	3.423	3.422	P

**Supplementary information:**  
- No fire or explosion  
- No rupture  
- No leakage  
- No venting

7.3.8.2	TABLE: Mechanical shock				P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results
B060	4.169	4.168	3.409	3.408	P
B061	4.173	4.172	3.425	3.424	P
B062	4.172	4.171	3.482	3.482	P

**Supplementary information:**  
- No fire or explosion  
- No rupture  
- No leakage  
- No venting



IEC 62133-2: 2017

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

<b>7.3.9</b>	<b>TABLE: Forced internal short circuit (cells)</b>					<b>N/A</b>
Sample no.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location <sup>1)</sup>	Maximum applied pressure (N)	Results	
<b>Samples charged at charging temperature upper limit</b>						
<b>Samples charged at charging temperature lower limit</b>						
<b>Supplementary information:</b>						
<sup>1)</sup> Identify one of the following:						
1: Nickel particle inserted between positive and negative (active material) coated area.						
2: Nickel particle inserted between positive aluminium foil and negative active material coated area.						

<b>D.2</b>	<b>TABLE: Internal AC resistance for coin cells</b>				<b>N/A</b>
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results <sup>1)</sup>	
<b>Supplementary information:</b>					
<sup>1)</sup> Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables					



**Attachment 1**

**Circuit Diagram & PCB layout**

Report No.: BCTC-FY190603420B


Product: Li-ion Polymer Battery

Type Designation: LP481922

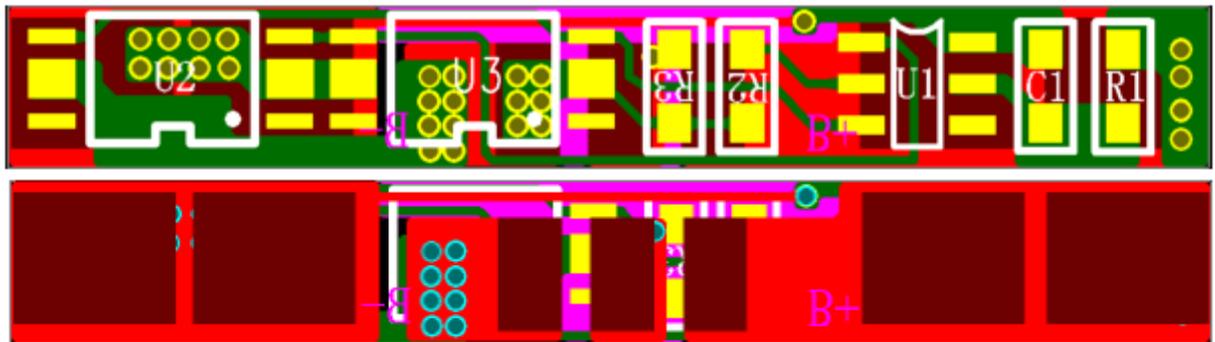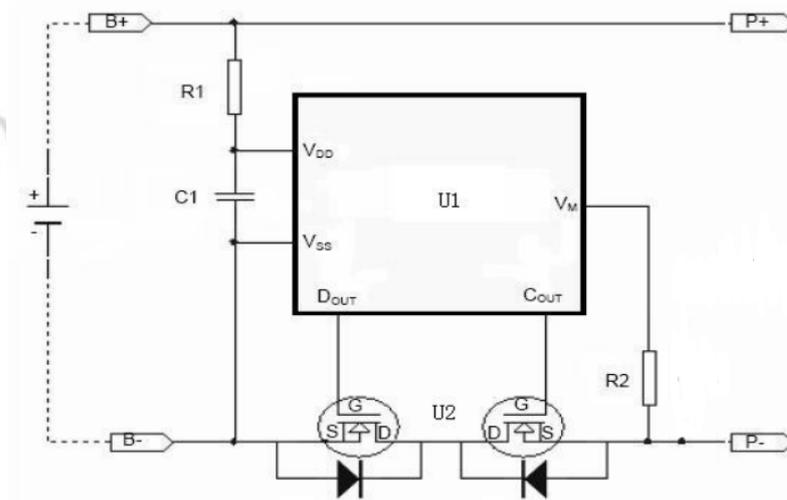


Product: Li-ion Polymer Battery

Type Designation: LP481922

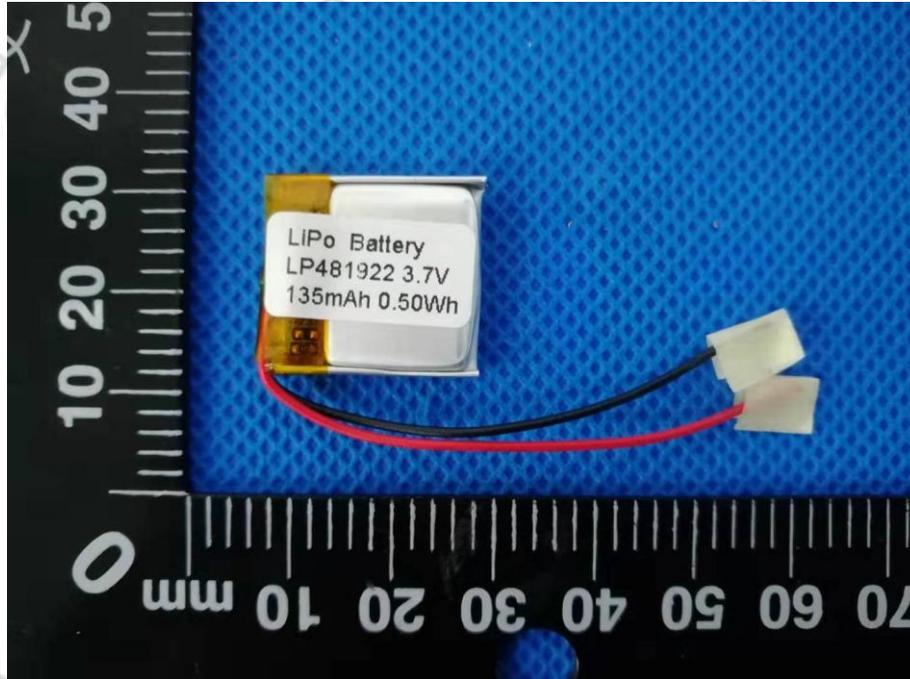


Front View of Battery Pack

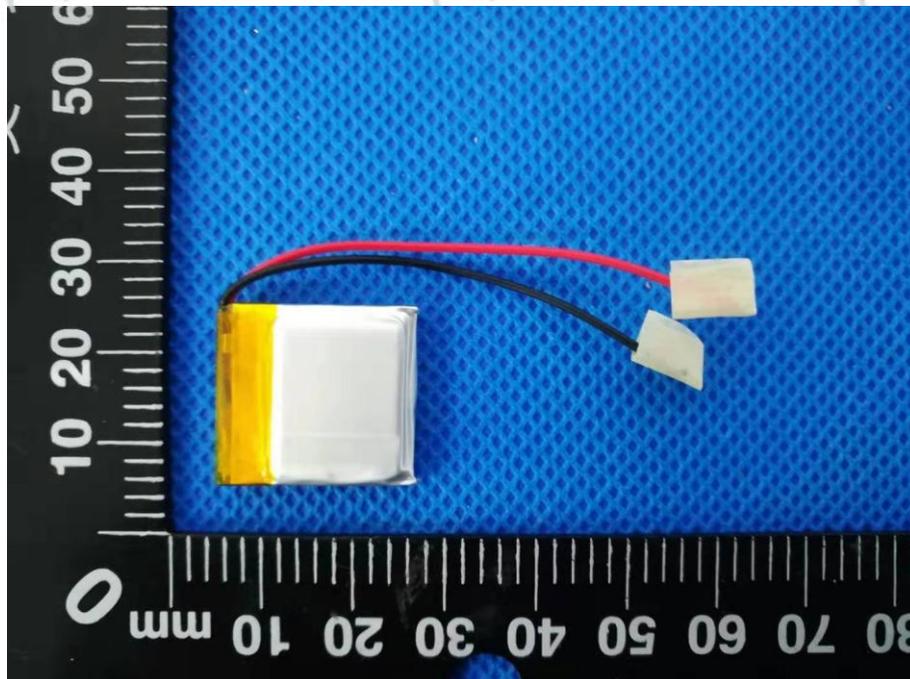


Back View of Battery Pack

Product: Li-ion Polymer Battery

Type Designation: LP481922

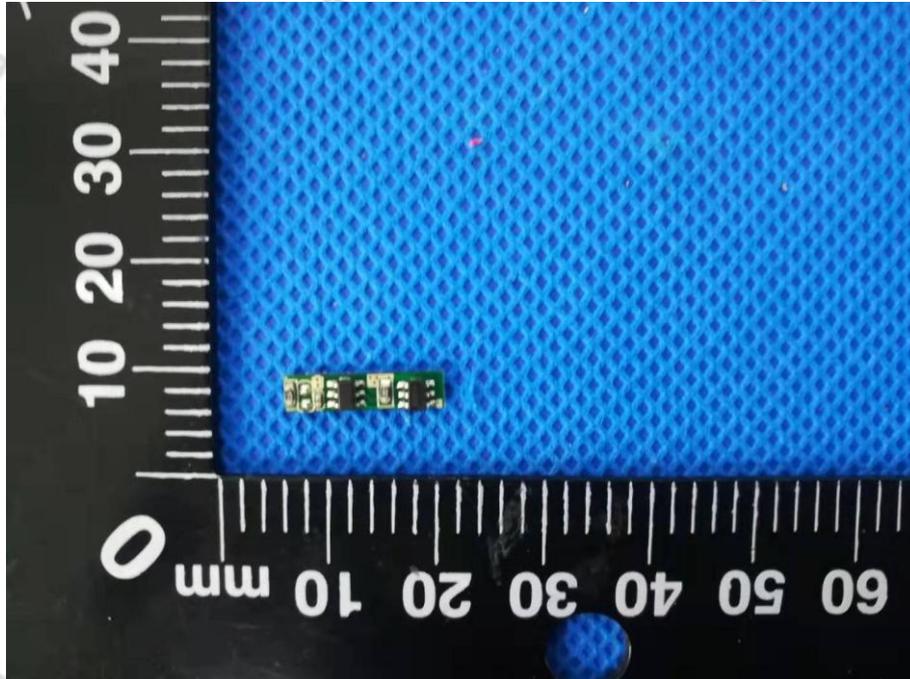


Front View of PCB

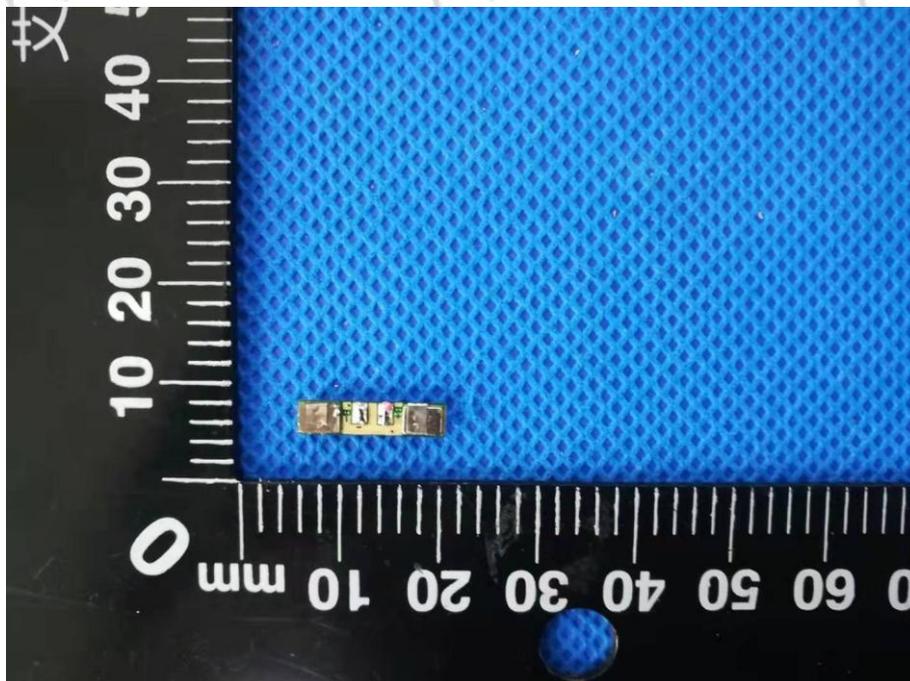


Back View of PCB

Product: Li-ion Polymer Battery

Type Designation: LP481922

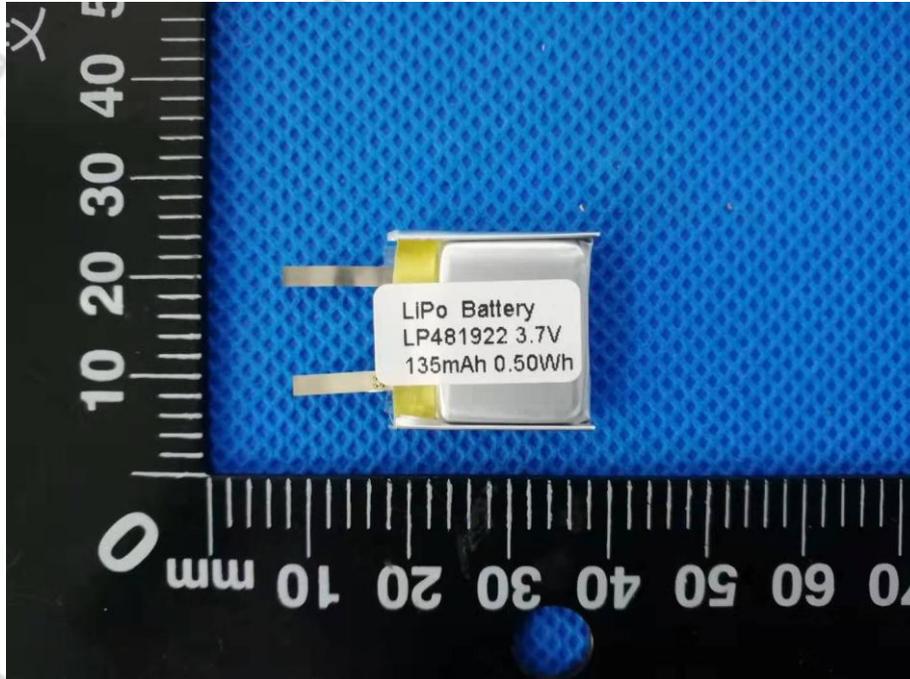

Front View of Cell

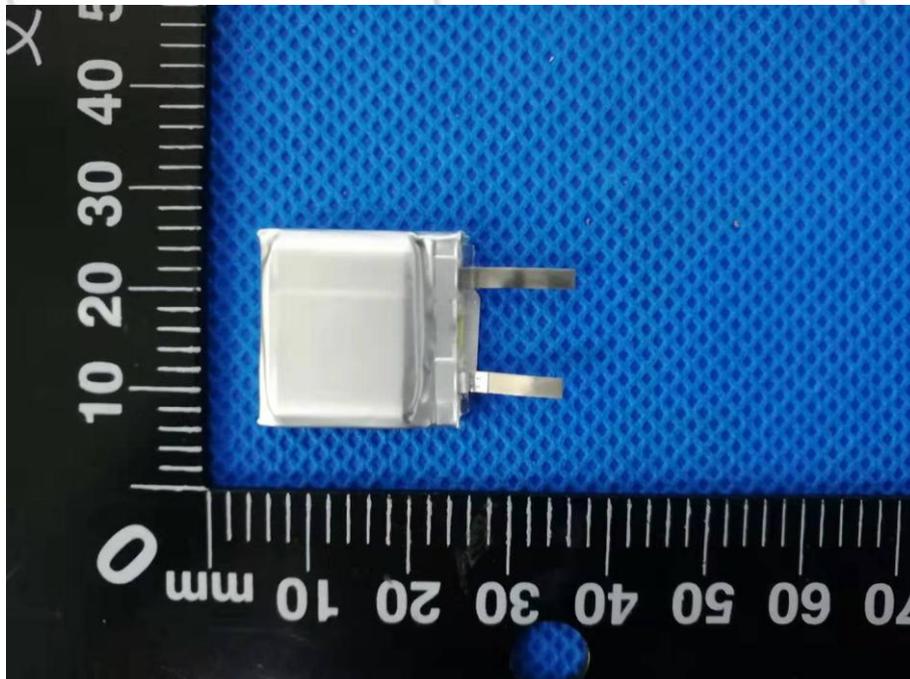

Back View of Cell

\*\*\*\*\* END OF REPORT \*\*\*\*\*